


# OUTDOOR WALL PACK T5



## FEATURES

- ▶ Multiple lamps prevent total fixture failure
- ▶ Higher CRI over HID
- ▶ Longer lamp life
- ▶ Rugged construction
- ▶ Mounting options
- ▶ Bronze color standard. Custom color available

## MOUNTING OPTIONS AND SHIELDS

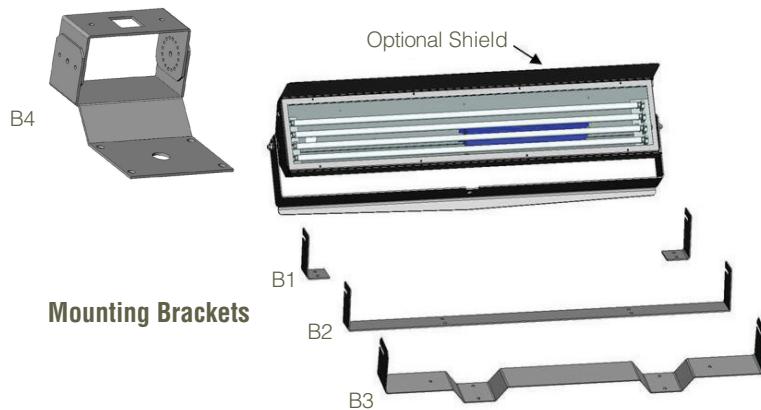

## APPLICATION

- ▶ Billboard Lighting application
- ▶ Energy efficient T5 HO fluorescent
- ▶ Retail, Institutional and Industrial
- ▶ Suitable for wall or tenon mount applications

## CONSTRUCTION

- ▶ Housing is 0.080 thick aluminum seam welded and ground with powder coated bronze finish
- ▶ Lens frame is single piece construction hinged from either side with positive locking spring loaded barrel latches
- ▶ Tempered 3/16" thick glass adhered to frame with closed cell rubber gasket
- ▶ Choice of four heavy gauge post painted steel mounts
- ▶ Specular optics provide increased efficiency over existing HID lighting

## ELECTRICAL

- ▶ Quality name brand electronic ballast, universal 120-277V
- ▶ Optional 480V
- ▶ Optional photocell
- ▶ Lamps secured in place with rotating camlock lampholders
- ▶ Shipped with 2-foot S.O. cord standard

### MOUNTING

- B1 - 2 ft. or 4 ft.
- B2 - 2 ft. or 4 ft.
- B3 - 4 ft. only
- B4 - 2 ft. only

### LENGTH

- 2 ft. uses 24 WATT T5 HO
- 4 ft. uses 54 WATT T5 HO

## ORDER LOGIC

<p><b>OWP</b></p> <p>Length 2- 2 ft. 4- 4 ft</p> <p>#Lamps 02 04 06</p> <p>Lamp Type 24- F24 T5H 54- F54 T5H</p>	<p><b>M N X</b></p> <p>Mounting 1- B1, 2 ft. or 4 ft. 2- B2, 2 ft. or 4 ft. 3- B3, 4 ft. 4- B4, 2 ft. Only X- None</p>	<p><b>Ballast</b></p> <p>UPR- Universal Programmed Rapid Start 4RN- 480v Rapid Start</p> <p><b>Ballast Configuration</b> 002- (1) 2 lamp 004- (1) 4 lamp 022- (2) 2 lamp 024- (1) 2 lamp, (1) 4 lamp 222- (3) 2 lamp [Note: For 2' version use "002- (1) 2 lamp"]</p>	<p><b>Cord Length</b> 2- 2 ft. 6- 6 ft. 8- 8 ft. 1- 12 ft.</p>	<p><b>Nema Plug</b> A- 120v 15 amp straight-blade B- 277v 20 amp twistlock C- 480v 20 amp twistlock D- 277v 15 amp twistlock F- 120v 15 amp twistlock X- None</p>	<p><b>XX X X</b></p> <p><b>Special Options</b> L- Lamps installed P- Photocell 90D- Past 90 degree aiming (Lens frame overlap housing)</p>
--	--	---	--	---	--

